


A WATERLOGGED SHOWER CASE, THE HIDDEN PROBLEMS



TERSO MR ® helps to preserve shower structures for a lifetime, by permanently reinforcing the settling movements, creating a frontline barrier from impurities and water intrusion underneath, preventing waterlogging, the leading cause of leaks, rot and decay in showers ultimately leading to needless demolition.

The initial evaluation consists of identifying the weak points of water intrusion underneath the shower substrate.

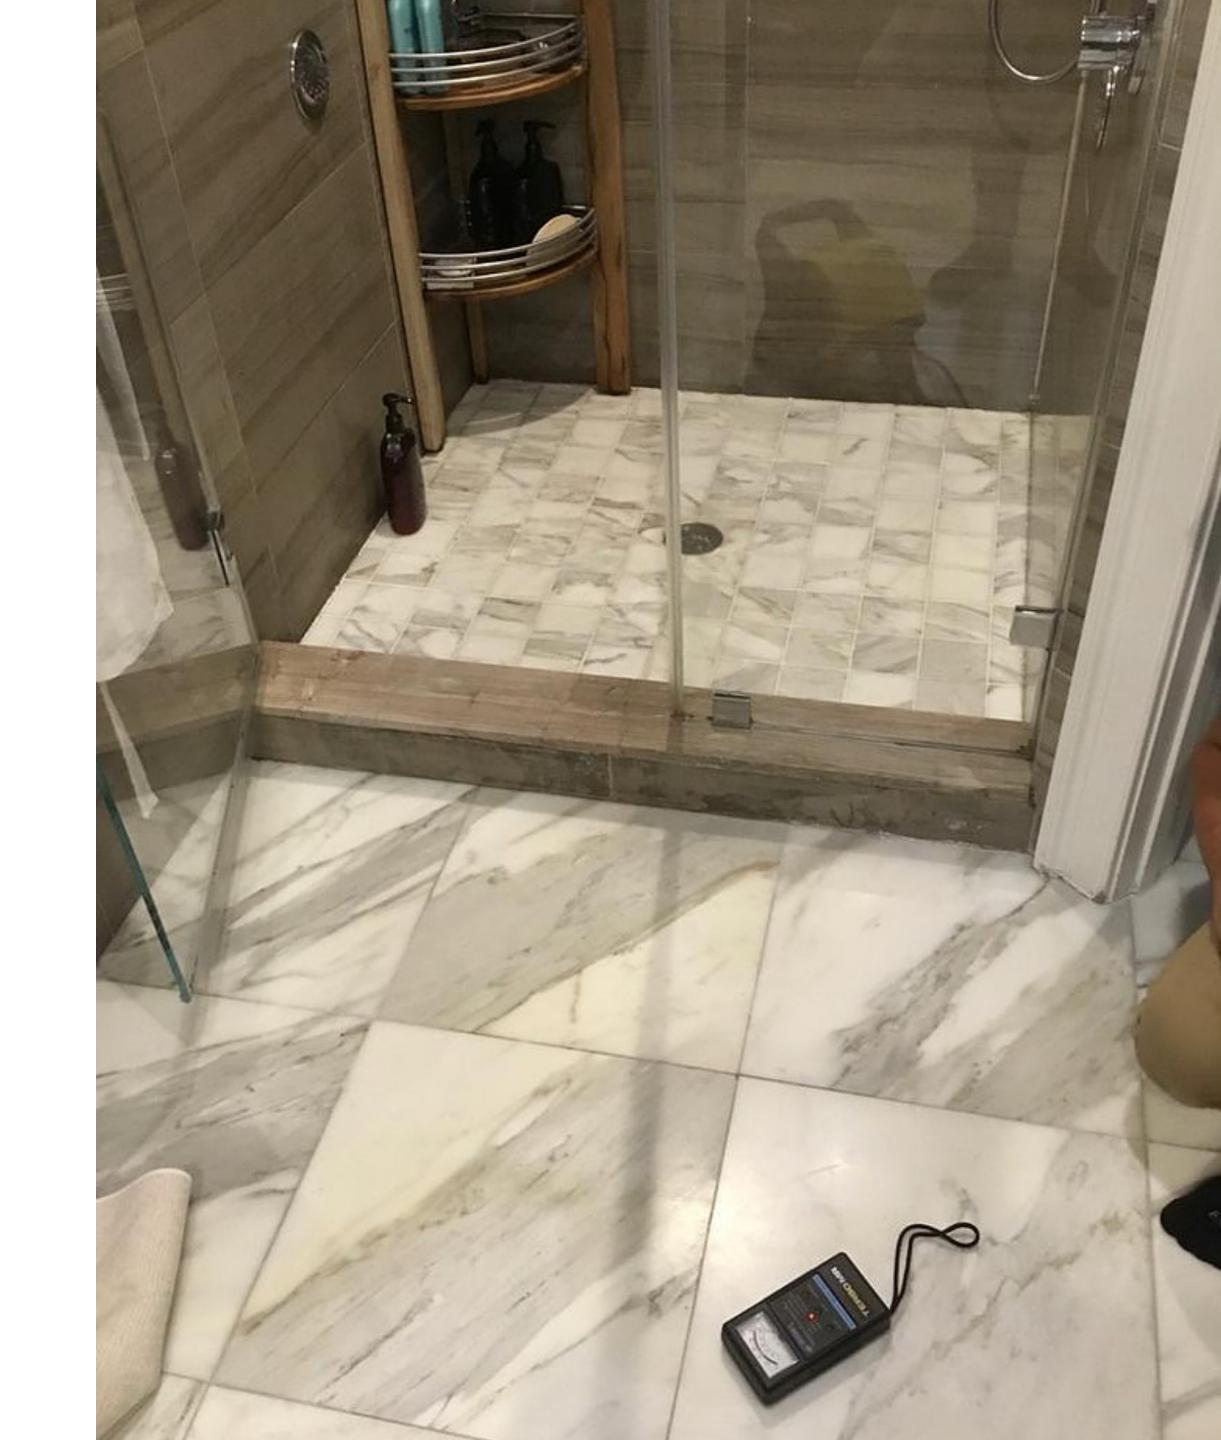





An elegant marble shower, with severe waterlog. How does it happen? The unseen water intrusion destroys the most durable materials in showers.

TERSO MR is assisting in identifying, correcting, and preventing future waterlog in the new and existing shower structures, adding value and durability. Thus saving valuable resources.



The shower weak points where water and impurities will intrude and eventually waterlog, rot away and destroy the shower. The corner perimeters are the areas that become cracked and unstable when the usual new structure settles.









Water intrusion through grout, has already loosened, broken and shifted some of the marble tiles.



Calcium and impurities clogged drain weep holes underneath.

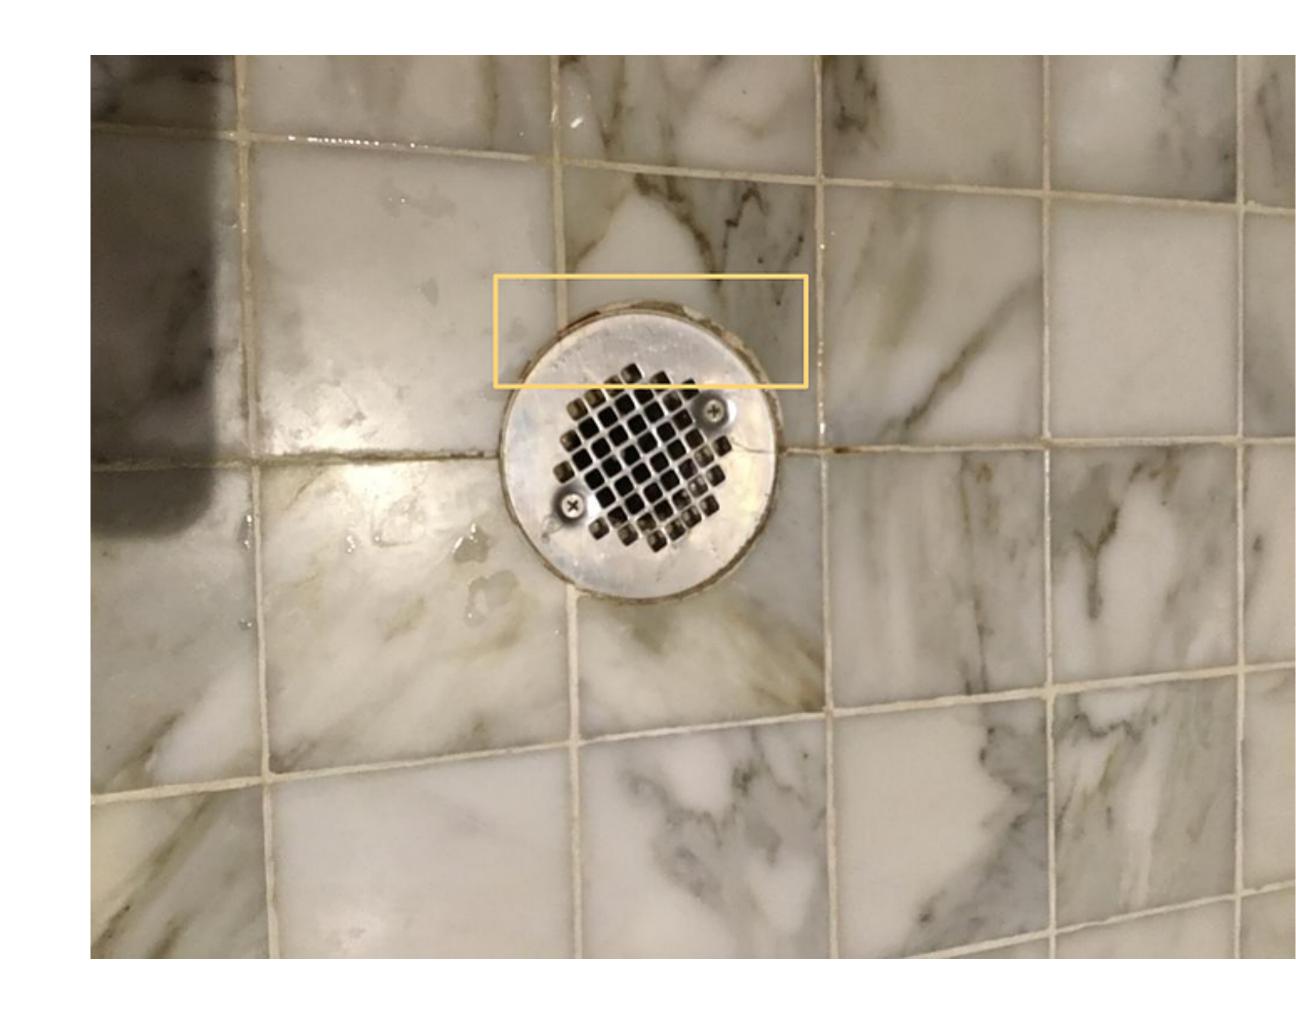



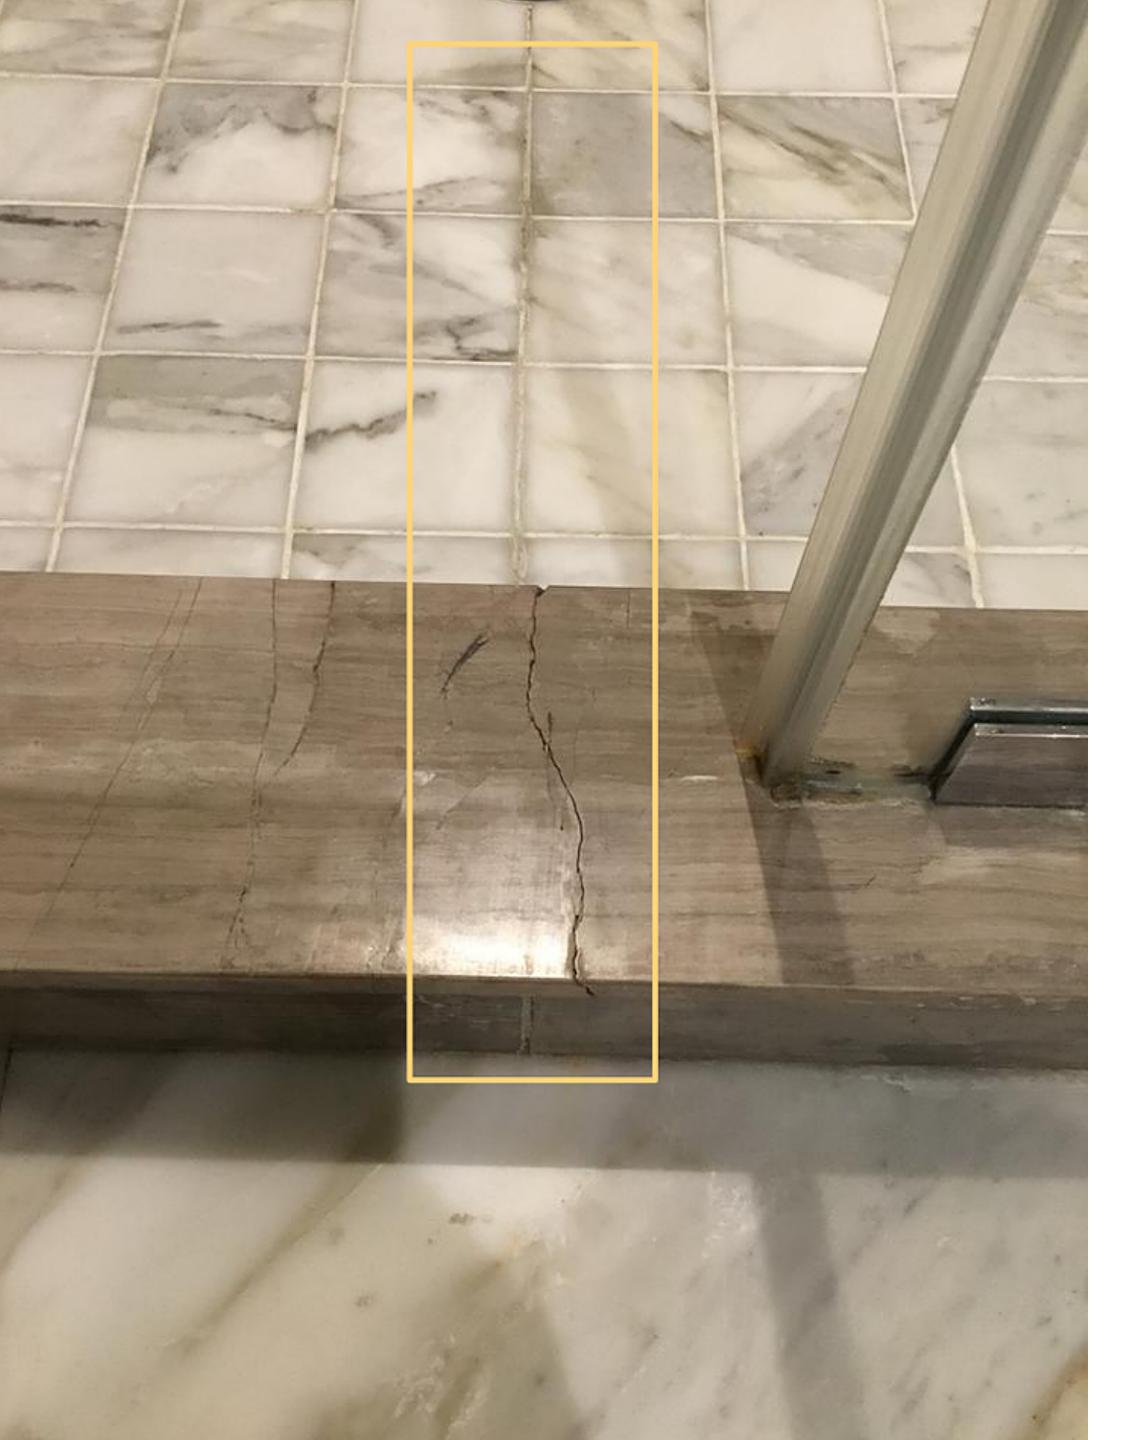


Notice the pattern where underneath moisture and water pressure has broken the grout on the floor and shower threshold leading the water and moisture outside of the shower through the substrate.



Plastic seal strips need replacing





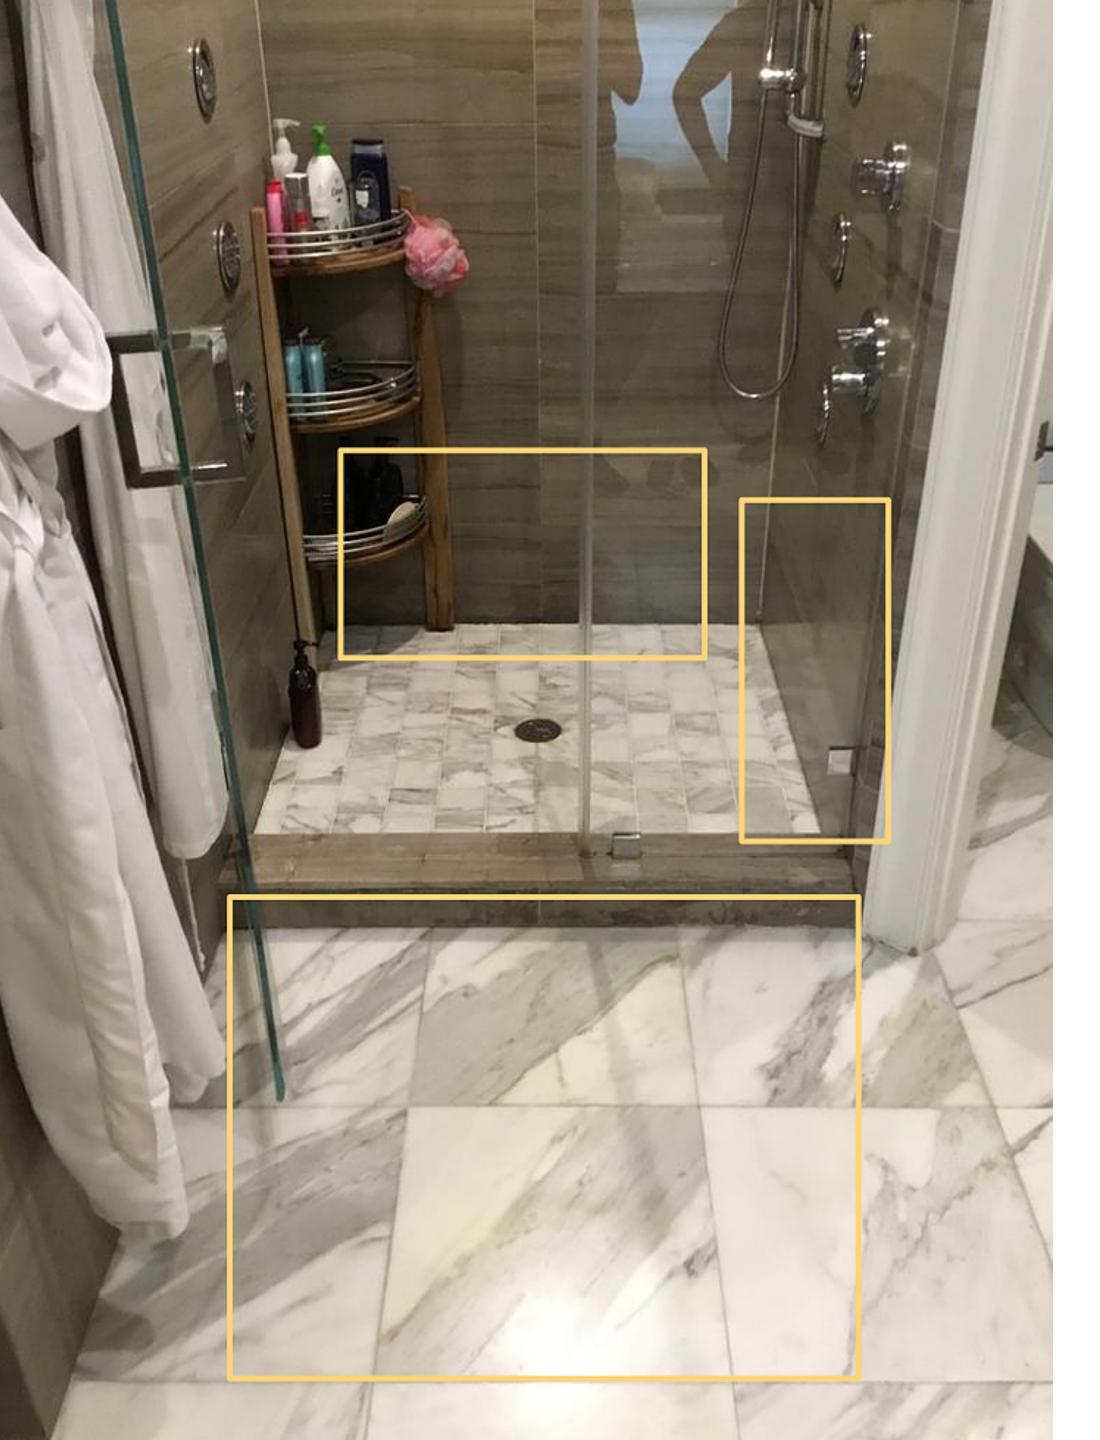

Water and moisture has raised up and out of the shower, about two feet outside the shower floor substrate. Not visible on the surface.



For extra precautions is a good idea to apply a thin bead of silicone around top areas of shower mixer valves and fixtures

Shower glass enclosures weak points for water to escape through. Shower glass enclosure need silicone around perimeter replaced.








THE FINAL RESULT

The final results of a structurally sound shower reinforced by TERSO MR, we can say with great confidence it will stand the test of time.

TERSO MR recommendation is to follow our simple surface care instructions, after the full preservation and waterlog in showers are corrected. Have TERSO MR every two to three years purify and seal the shower surface, or depending on the homeowner lifestyle and housekeeping methods. The TERSO MR surface service may not even be necessary that often.



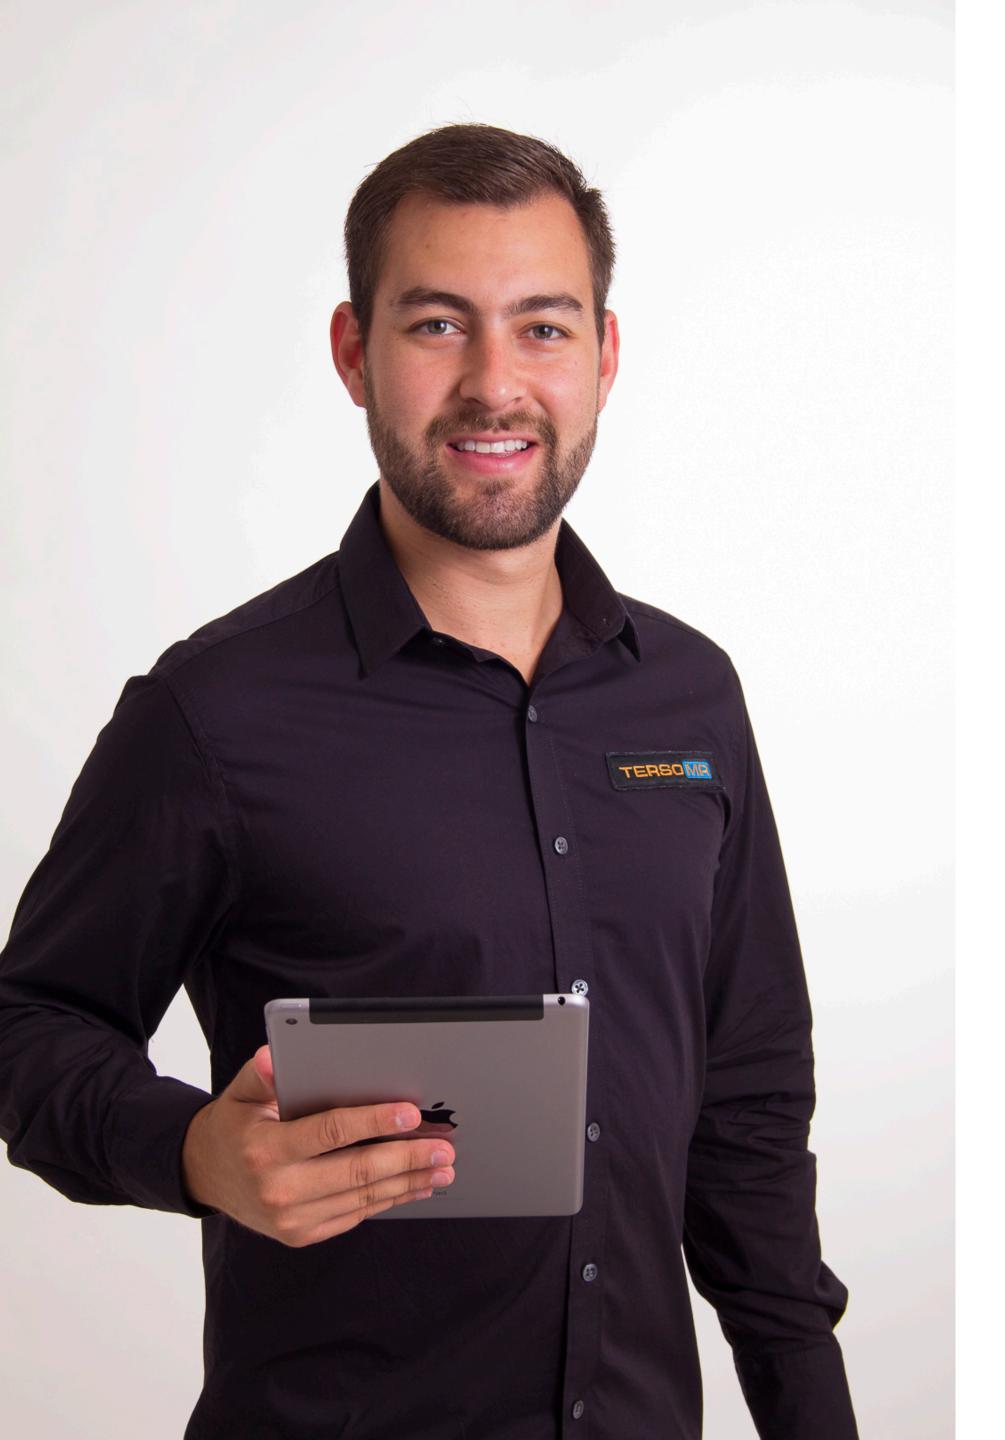

Contact TERSO MR for evaluations, our ability to find solutions, issue improvement and corrective action has led us to become the go-to consultants for premium Builders, Architects, Designers, Stone Suppliers, and their Clients.

BUILDING LIFETIME PARTNERSHIPS!







560 Sylvan Ave. Suite 3160. Englewood Cliffs, NJ 07632